




## PIXEL MAKER'S KIT QUICK START GUIDE

Your PIXEL Maker's Kit has the Android and Raspberry Pi firmware installed by default. To change the firmware, remove the microSD card and copy the desired firmware image files from <http://ledpixelart.com/firmware>. Re-insert the microSD card and power cycle the board.

Firmware	Android	iOS	Raspberry Pi	Grove Sensors	Low Power for Wearables	HUB75 LED Panel Support (E-Pin Panels Not Supported)
Android & Raspberry Pi (Default)	Yes	No	Yes	Yes	No	32x16, 32x32, 64x32, and 64x64
iOS & Android 32x16	Yes	Yes	No	No	Yes	32x16 Only
iOS & Android 32x32	Yes	Yes	No	No	Yes	32x32 Only

Step 1: Connect as shown and ensure the toggle switch is pointed towards BT or USB if using a Raspberry Pi.

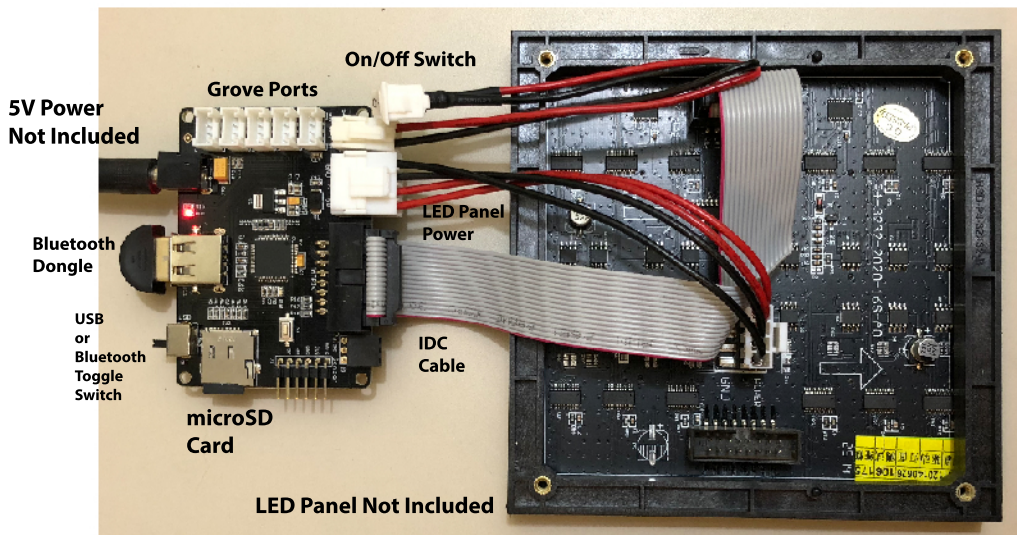

Step 2: Download PIXEL's free apps from <http://ledpixelart.com/apps>. Note the Android Bluetooth pairing pin code is: 0000. No pairing code is required for iOS.

**More info @ <http://ledpixelart.com>**

Designed by:  
Open Gadgets LLC

Manufactured by:  
Seedstudio

